

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Zuccherificio 2

29010 Sarmato (PC) - Italy

t +39 0523 8486

e info@jmgcranes.com



Data subject to change without prior notice
Edition 10/2022 © 2022 JMG Cranes S.p.A. All rights reserved
Rev. 2 - 10/22



Electric Pick & Carry Cranes



MC 160 (metric)

Max Capacity 16,000 kg

www.jmgcranes.com

JMG[®]
movetosolution

TELESCOPIC BOOM

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHTS

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- HYDRAULIC EXTENSION
- MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BASKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Load charts



Technical features

Max Capacity kg	 16,000	 Front-wheels drive. 2 electric motors AC 10 kW 96V Insulation class H	LMI. Electronic safe load indicator and tilting moment limiter
		 Total Kg. 19,950 Removable counterweights Kg. 5,070	
Dimension mm	 4395x2070x2000	 96 V - 1035 Ah 8 working hours	 Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
		 Front nr. 4 superelastic 355/50-20" Rear nr. 2 superelastic 355/50-20"	 Fabricated from preformed and welded quality steel plate
		 Rear Steering angle -90°/+90°	 +65°/-4°
			 Motor driven pump 1x24 kW-96 V AC, 1x12 kW-96 V AC

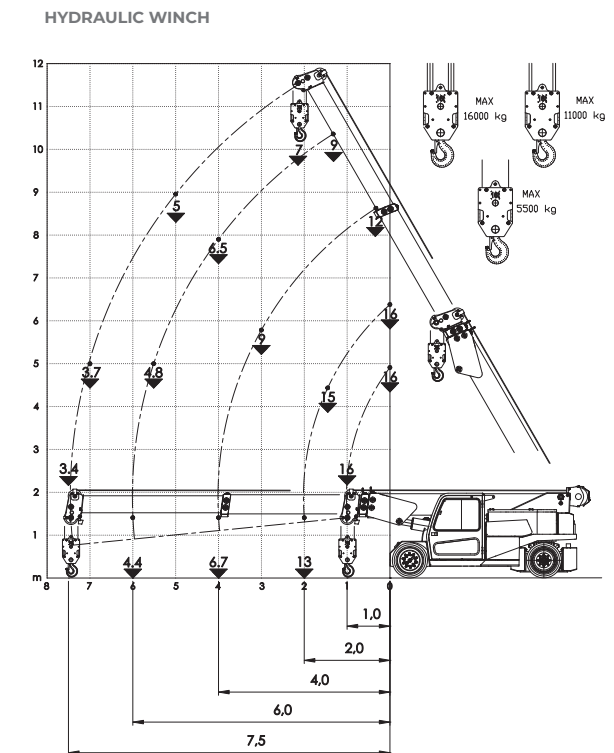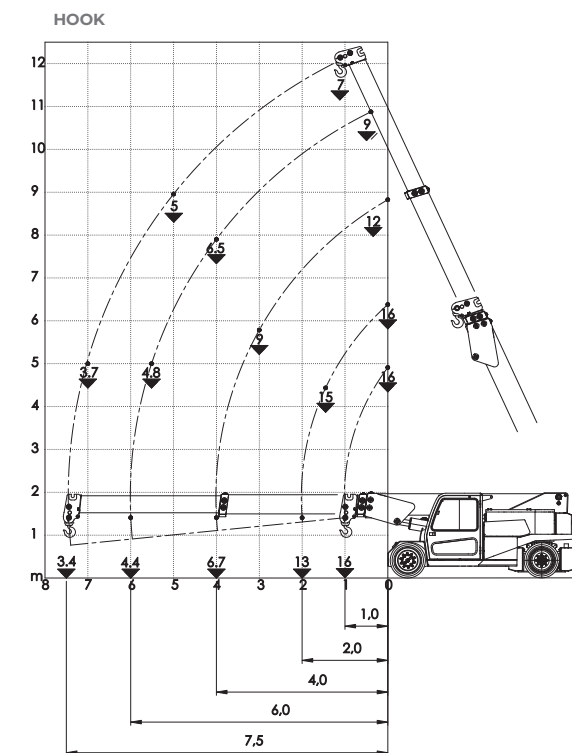

EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE-2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

