

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Zuccherificio 2

29010 Sarmato (PC) - Italy

t +39 0523 8486

e info@jmgcranes.com



Data subject to change without prior notice
Edition 10/2022 © 2022 JMG Cranes S.p.A. All rights reserved
Rev. 2 - 10/22



Electric Pick & Carry Cranes



MC 250 (metric)

Max Capacity 25,000 kg

www.jmgcranes.com

JMG[®]
move to solution

PROPORTIONAL TELESCOPIC BOOM
FRONT-WHEELS DRIVE WITH COUNTER ROTATION
REMOVABLE COUNTERWEIGHTS

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- HYDRAULIC EXTENSION
- BENDABLE MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
- FRONT OUTRIGGERS
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BASKET
- ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Load charts



Technical features

Max
Capacity
kg



25,000

Dimensions
mm



4770X2150X2200



Front-wheels drive.
2 electric motors AC 12 kW 96V
Insulation class H



Total Kg. 28,250
Removable counterweights Kg. 6,220



96 V - 1125 Ah
8 working hours



Front nr. 4 superelastic 355/50-20"
Rear nr. 2 superelastic 355/50-20"



Rear
Steering angle -90°/+90°

LMI.

Electronic safe load indicator and
tilting moment limiter



Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels



Fabricated from preformed
and welded quality steel plate




+60°/-7°




Motor driven pump
1x16 kW - 96 V AC.

HOOK

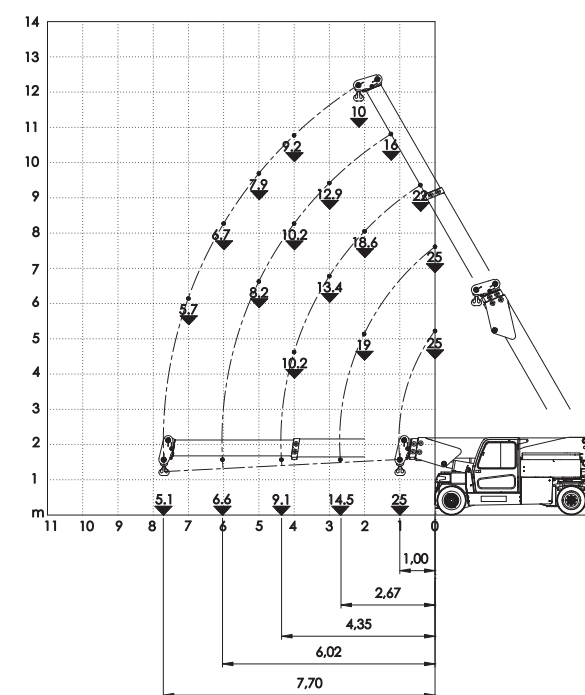

FRONT OUTRIGGERS

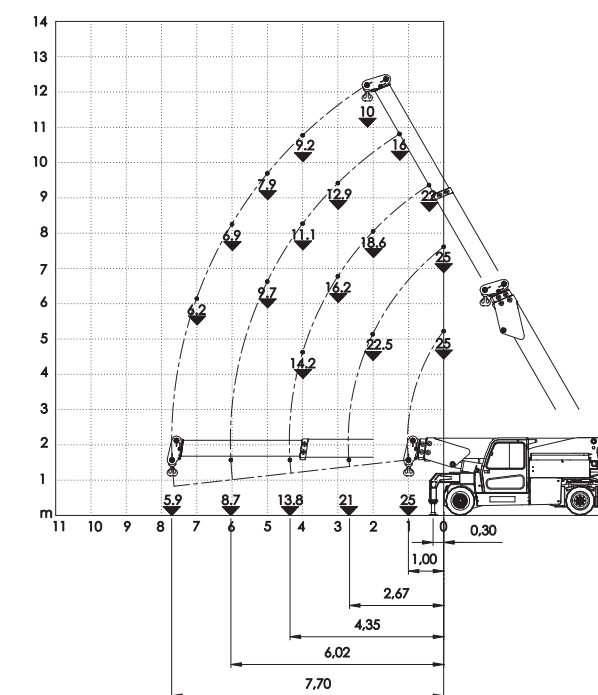

EU Standards CE

	UNI ISO 4301-1: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

