


TH 4,5.15



CONSTRUCTION



LOGISTICS



EVENTS AND
FILM





TH
4,5.15



CAB

Best-in-class
safety and visibility



PERFORMANCE

Unrivalled lifting
performance



LOAD LIVE DIAGRAM

Two real-time dynamic
load charts

TH
4,5.15

TH
4,5.15

TH
4,5.15



TH
4,5.15




TH
4,5.15



TH
4,5.15


Load chart with **FULLY EXTENDED STABILIZERS**

ATT-03-042

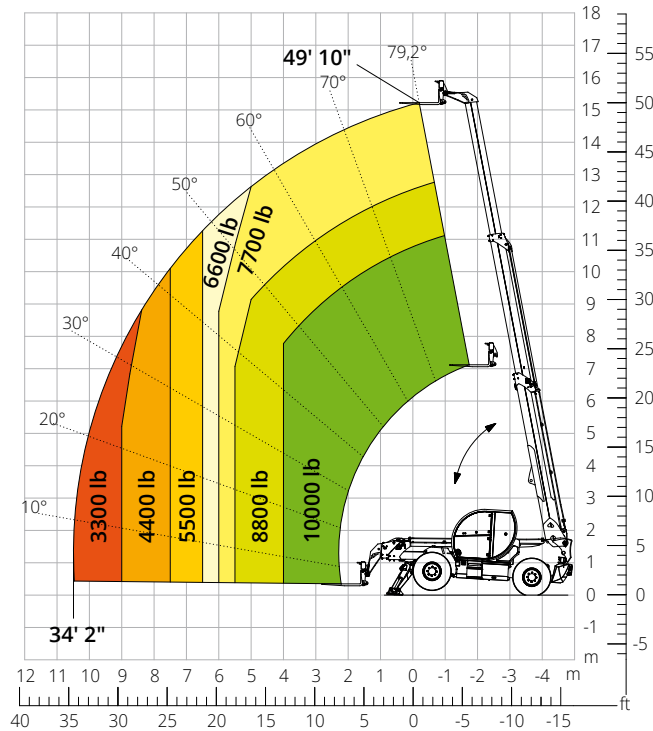


Load chart **FRONT ATTACHMENT ON TIRES**

ATT-03-042

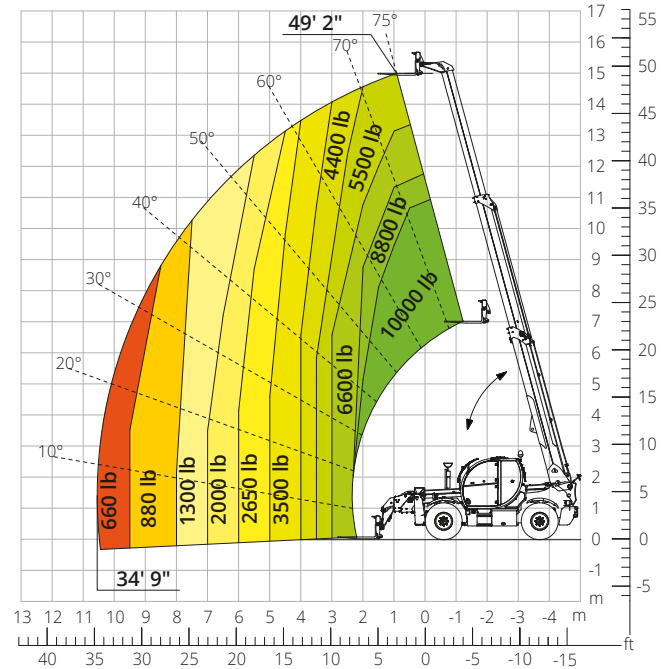


Load chart with **WINCH, 11,000 lb**

ATT-02-019

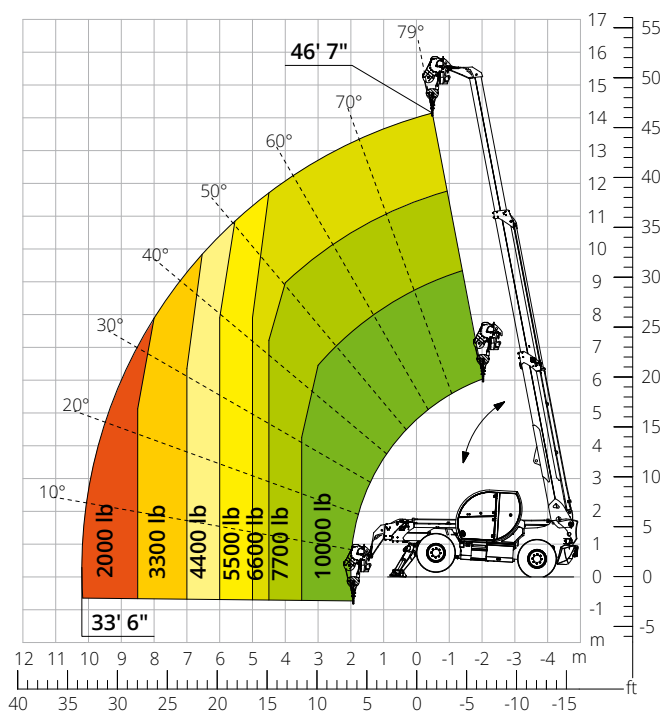


Load chart with **JIB WITH WINCH, 3,300 lb**


ATT-04-011

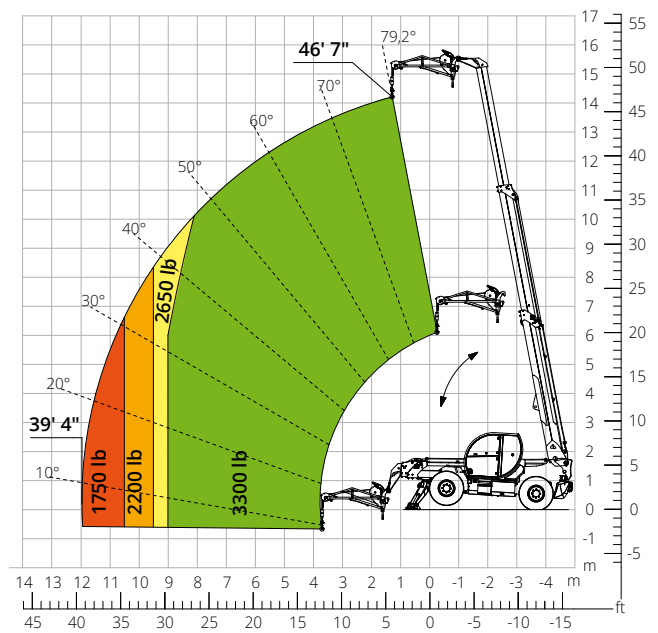


Load chart with
JIB 4,400 lb
ATT-04-013

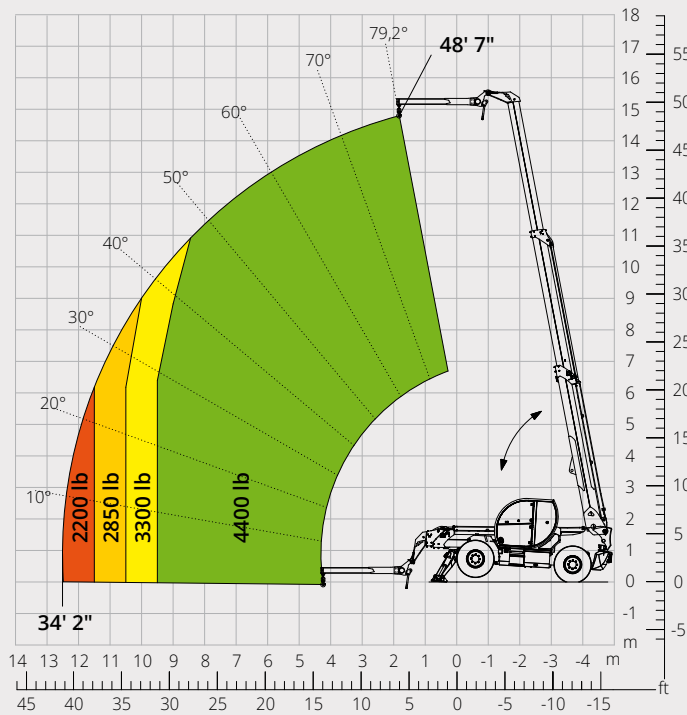


Load chart with
HOOK, 11,000 lb
ATT-05-014

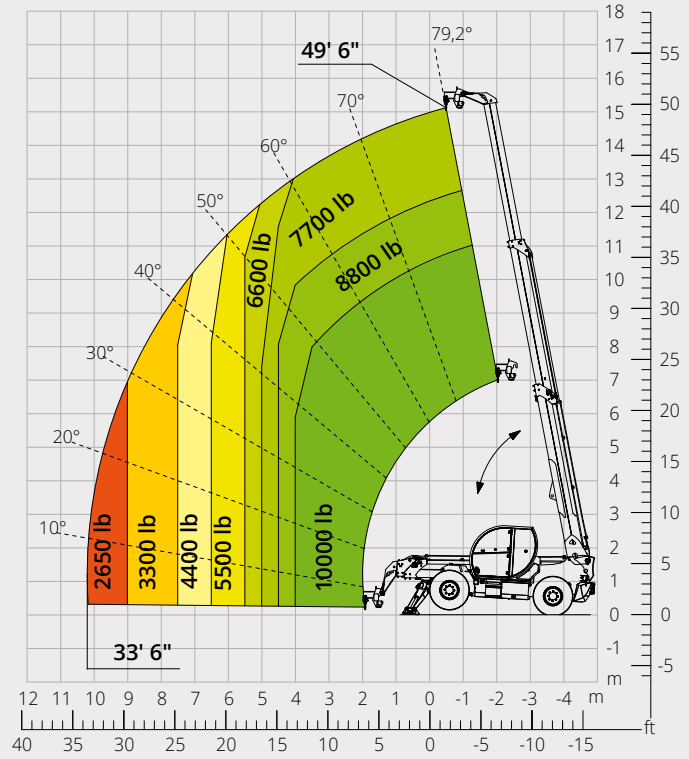


Load chart with
ROTATING EXTENDABLE PLATFORM, 1,100 lb
ATT-01-007

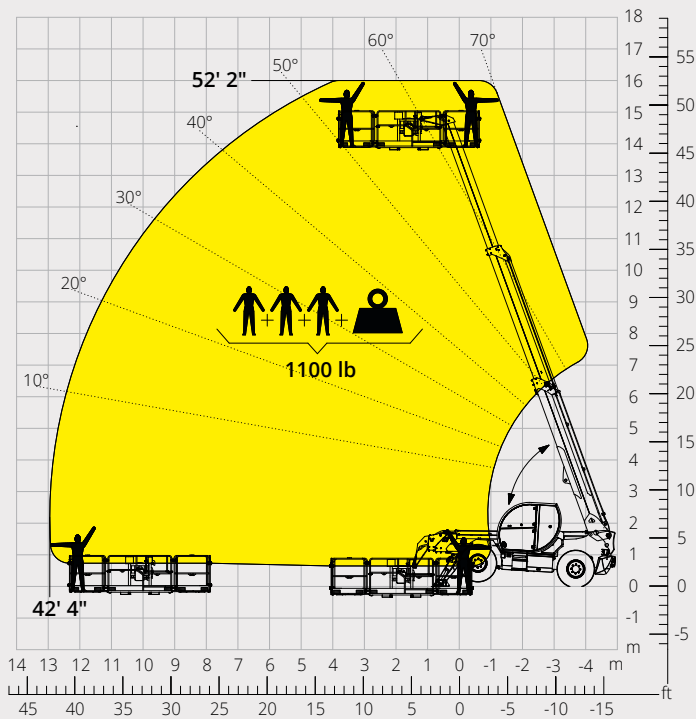


Load chart with
ROTATING EXTENDABLE PLATFORM, 2,200 lb
ATT-01-016

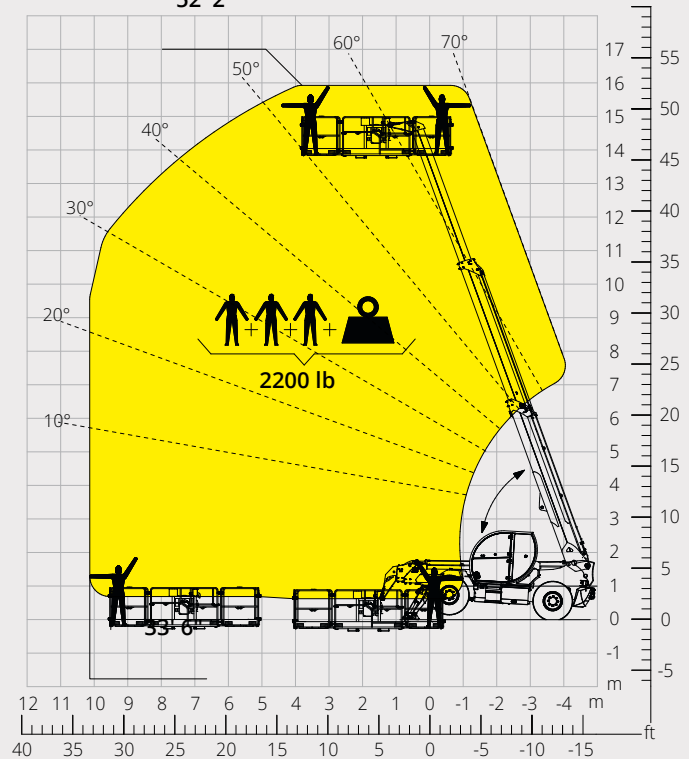


Load chart with
FIXED PLATFORM, 550 lb
AT-01-001

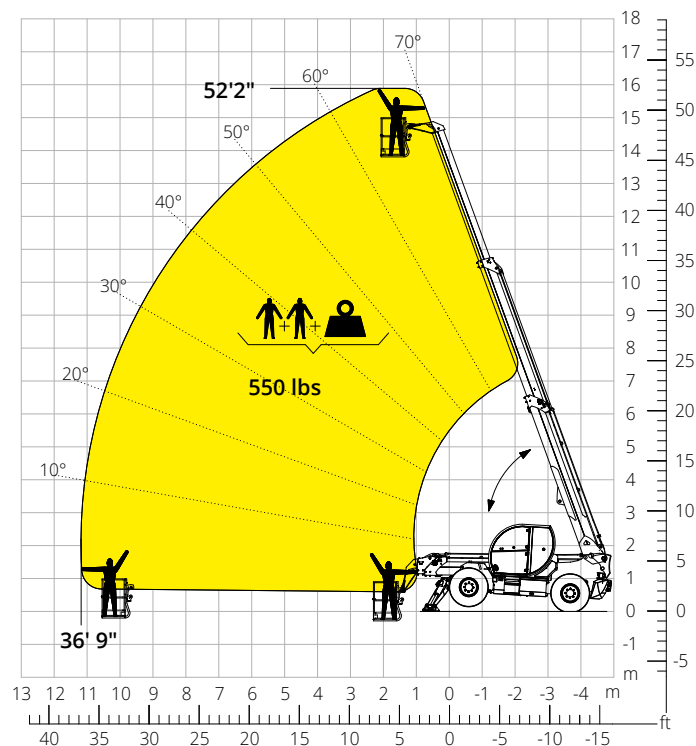

Load chart with
**ROTATING NON-EXTENDABLE
PLATFORM, 550 lb**
AT-01-003

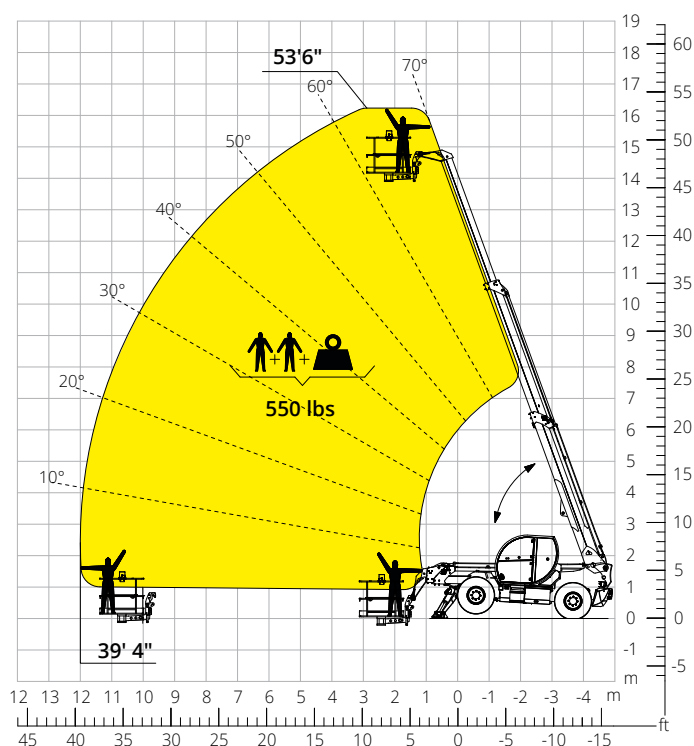

Load chart with
PLATFORM, 1,000 lb, FOR MINES
AT-01-027

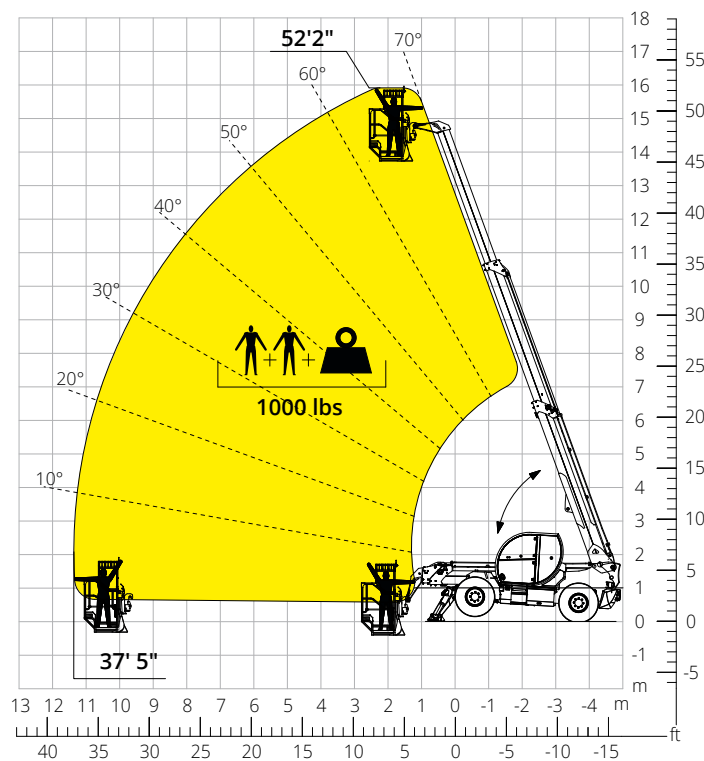

Machine model	Telescopic handler	TH 4,5.15	
	Maximum lifting capacity	10,000 lb	
	Maximum lifting height	49' 10"	
	Maximum reach	34' 2"	
Stabilizers	Type	Pivoting	
Engine	Model	Deutz TCD 3,6 L4 EDG - Stage IIIA	Deutz TCD 3,6 L4 Stage V
	Rated power	55.4 kW (75.3 hp) at 2,200 rpm	
	Maximum torque	299 lb/ft at 1,300 rpm	
	Displacement	3.6 l	
	Cylinders	4 in line	
	Engine configuration	Turbocharged direct injection diesel	
	Cooling system	Water – intercooler	
Transmission	Type	Hydrostatic	
	Maximum pressure	530 bar	
	Gear box	Dropbox, 2 speeds forward-reverse	
Axles and brakes	Type	Axles with planetary gearboxes	
	Front axle	Oscillating and steering with levelling, +/-8°	
	Rear axle	Oscillating and steering with hydraulic lock	
	No. of driving/steering wheels	4WD - 4WS	
	Steering mode	Frontal/Concentric/Crab	
	Service brake	Wet multi-disk on front and rear axle	
	Parking brake	Hydraulic with negative action on front axle	
	Tyres dimensions	445/65 R22.5	
Performance	Max. travel speed	16 mph	
	Maximum mass towable on hook	6,850 lb	
	Gradeability	43%	
	Turning radius (end of forks)	18'10"	
Weights	Total unladen*	26,900 lb	
	Front axle unladen (boom retracted and lowered)*	11,700 lb	
	Rear axle unladen (boom retracted and lowered)*	15,200 lb	
Tank and system capacities	Fuel tank	52.8 U.S. gal	
	AdBlue	-	
	Hydraulic oil tank	24.6 U.S. gal	
	Engine oil tank	2.4 U.S. gal	
	Cooling liquid	5.3 U.S. gal	
Hydraulic circuit for movements	Circuit type	Load sensing	
	Service pump	Variable displacement	
	Max. hydraulic flow rate	90 l/min	
	Max. boom head flow rate	75 l/min	
	Max. operating system pressure	350 bar	
	Controls for boom movements	SIL 2 electro-proportional valve	
	Movements control	1 joystick with integrated manoeuvre enable	
Standard met	2006/42/EC: EU Machinery Directive		
	2016/1628: EU Regulation on the emissions of stage V engines		
	EN 1459-X: Relating to standards on the safety requirements for variable reach machines		
	EN 280/EN 280-1/EN 280-2: standards relating to mobile elevating work platforms (if available)		
	ROPS/level 2 FOPS: relating to the standards for protective structures		

The data given in this brochure are provided for information purposes and are subject to change without prior notice.

All images are purely guideline and might not give an exact representation of the product.

**the stated weight refers to the vehicle unladen with standard equipment and may vary depending on the chosen configuration.*

The standard machine configuration includes:

CAB

- Comfort seat with adjustable headrest
- Adjustable steering column
- Analogue joypad
- Adjustable sunblind
- Heating
- Ambient LED lights
- USB Type-A and Type-C (5 V) inputs

REAL TIME INFORMATION

- Touchscreen, 7"
- MCTS – Magni Combi Touch System on-board software
- Automatic RFID tools recognition system
- LMI – Load Moment Indicator
- LLD – Live Load Diagram
- Onboard and remote integrated diagnostics

TECHNICAL SPECIFICATIONS

- Q-Fit standard
- Advanced three-line CAN BUS system
- Automatic front and rear wheel alignment
- Automatic parking brake
- Mechanical battery cut-off in engine compartment
- Electrical system: 24 V – IP67

SERVICE

- Warranty: 24 months/2,000 hours